



ESLINGAS DE CABLE DE ACERO

∅ Grummet (mm)	∅ Cable (mm)	Carga Trabajo Kg (SF:6)	Peso (Kg/m)	Carga mínima de rotura (kN)
30	10	15.369	3,068	763,581
33	11	18.596	3,712	911,833
36	12	22.131	4,417	1.085,156
39	13	25.973	5,184	1.273,552
42	14	30.123	6,012	1.477,018
48	16	39.344	7,853	1.929,167
54	18	49.795	9,939	2.441,602
60	20	61.475	12,270	3.014,323
66	22	78.245	14,847	3.647,331
72	24	93.262	17,669	4.340,625
78	26	112.584	20,736	5.094,206
84	28	134.417	24,049	5.908,073
90	30	158.987	27,608	6.782,227
96	32	186.553	31,411	7.716,657
102	34	217.405	35,460	8.711,394
108	36	261.871	39,755	9.766,407
114	38	290.325	44,295	10.881,707
120	40	333.196	49,080	12.057,293
126	42	380.980	54,111	13.293,165
132	44	434.237	59,367	14.589,324
138	46	493.630	64,908	15.945,770
144	48	559.925	70,675	17.362,502
150	50	634.025	76,688	18.839,520
156	52	692.619	82,945	20.378,825

CABLES GUARDINES (GRUMMET)

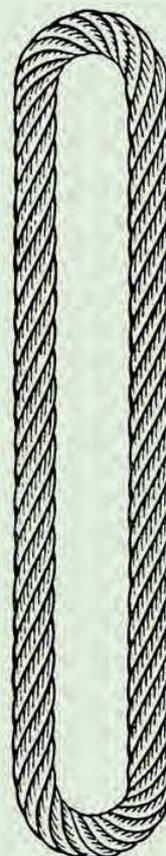

- Eslingas de cables sin fin - EN-13414-3
- Construcción: 7x6x36 WS - CN
- Resistencia : 1960 N/mm²